


Pro-Stitcher®

Edge to Edge Using Drag and Drop

1. Select design


- Select **File** tab.
- Press **Design**.
- Press **Open**.
- Select **Designs\2-PS Tutorials**.



- Press **Open**.


2. Create an area

- Select **Area** tab.
- Move machine to top left corner of the quilt.
- Press **2 Corner**.



- Move machine to the bottom right side of the quilt throat space.
- Press **2 Corner** again.
- The area now appears as a purple box, but it is not the complete quilt height.

- To adjust the area height measurement enter the height of the quilt plus 2 inches in the sidebar.

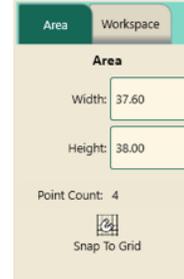

- Press **Refresh**. The whole quilt area will be displayed on the screen in the purple box.




3. Repeat design in area

- Select **Repeat** tab.
- Press **Fill** under **Horizontal** in the sidebar.




- Using **Fill** will repeat the design at its original size in the area without skewing or stretching.

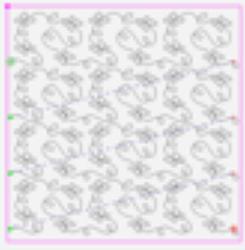

- To fill the area completely, add more horizontal or vertical repeats and then stretch horizontal and vertical.



- Press **Baseline**.
- Save Workspace by pressing **File Tab**, then **Save**.

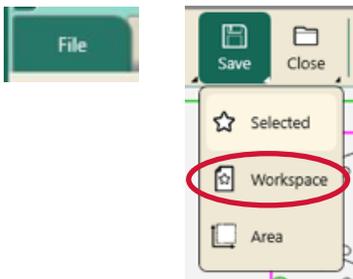

- Select **Workspace** (shown above)
- Save in Selected area.
- Tap **Save** in Save File window when done.

4. Quilting the design


- Select **Pro-Stitcher** tab.
- Press **Quilt**.
- Select the Tie-off and pull-up functions in the sidebar as shown below.



- Press **Run**.
- Press **Proceed**. The machine will move to the start point, take a pull-up stitch, and disable the motors.



- Bring up the bobbin thread, then press **Resume**.
- The machine will stitch the tie-off and continue on to stitch the design.

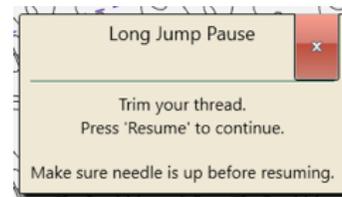

- After quilting row 1 the machine will tie-off and the motors will disable. Cut the threads.

- Looking at the quilt, move the machine needle to a point on the bottom of the design that just stitched out.



- Press the needle down button. This will drop the needle down into the fabric, attaching the machine to the fabric.
- Press **Drag**. This will attach the crosshairs to the design (Crosshairs on screen represent the needle in the fabric).



- With the needle down in the quilt, release the clamps and advance the quilt until there is enough un-quilted space to quilt the next row.
- Check the quilt around where the needle is in the fabric to make sure it is not being stretched or tugged by the needle. Adjust the machine position if necessary.
- Attach the side clamps.

- Press **Drag\Drop** button again to drop the design in place on the screen.



Note: Using the Drag/Drop function allows the design to reposition as the quilt is being advanced.

- Press the **Needle Up** button.
- Baste the side edges of the quilt in the new throat space.
- Row 2 is now positioned to stitch.

Note: If still in Baste mode, remember to switch back to stitch mode before moving on.

- Press **Resume**.



- Quilt Row 2.
- Continue on, advancing the quilt and the design in the same manner till you finish.